



-  PVC Starterkabel
-  PVC Starter cable
-  PVC Batterie/Anlasserkabel
-  PVC Câble de démarrage

NEN: Vdf 450/750
 CLC: H07V-K IEC:
 227 IEC 02
 NEN 1010

 +5°C / +50°C
 450/750V
 2500V



10.0 qmm - VDS - Ø 6.5 mm - 50 amp.



D04001 ● 25 m

D04002 ● 25 m



16.0 qmm - VDS - Ø 7.8 mm - 68 amp.



D04003 ● 25 m

D04004 ● 25 m

25.0 qmm - VDS - Ø 10.0 mm - 89 amp.



D04005 ● 25 m

D04006 ● 25 m

35.0 qmm - VDS - Ø 11.5 mm - 110 amp.



D04007 ● 25 m

D04014 ● 25 m


50.0 qmm - VDS - Ø 13.0 mm - 134 amp.



D04008 ● 25 m

D04047 ● 25 m

70.0 qmm - VDS - Ø 15.0 mm - 168 amp.

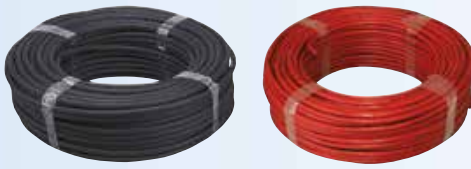

D04009 ● 25 m

D04090 ● 25 m

95.0 qmm - VDS - Ø 17.2 mm - 189 amp.



D04091 ● 25 m

D04092 ● 25 m

Extra soepele uitvoering

Stugge uitvoering / dunne buitenmantel

35.0 qmm - H07V-K - Ø 11.5 mm - 110 amp.



614844/25 ● 25 m

614851/25 ● 25 m

35.0 qmm - VDS - Ø 10.5 mm - 110 amp.



D04007K ● 25 m

D04014K ● 25 m

